

# Installation of Drivemotor 217205

---

Make sure that alle parts are present.

- |   |      |    |        |                   |
|---|------|----|--------|-------------------|
| 1 | 1pcs | ST | 217209 | Motor 24VDC 42RPM |
| 2 | 1pcs | ST | 217305 | Hub 16x28mm hexag |
| 3 | 1pcs | ST | 88245  | Lock Disc 4,3 MM  |
| 4 | 1pcs | ST | 88248  | Washer 1,5x4,2x18 |
| 5 | pcs  | ST | 88325  | Screw MG 6x12 A4  |


Remove the old motor by unscrewing the gear train plate, unscrew the three screws holding the motor.

Disconnect the motor from the three pol terminal underneath the dryer section.

Mount the new motor on the gear train using the three screws 6x12.

Put the gear on the motor, put the hub on top of the gear. Put the gear train plate back in place.

Connect the wires to the motor according to the motor drawing.

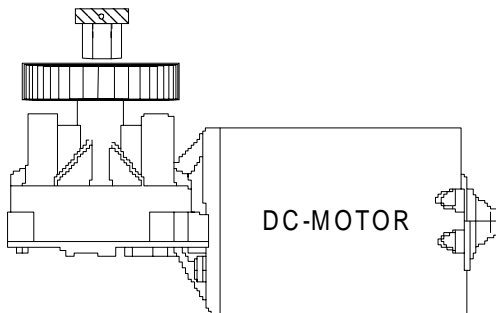


*Mounting the gear with the hub. Mount the lock disc, awasher and screw when motor mounted.*

Wiew of the motor



# Mounting your new motor:

Unscruve the motor.

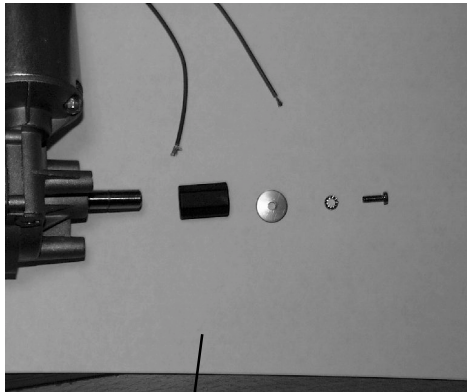

Mount the new motor and Gear.



Mount the electrical connections and condensator.

## **The motor drawing connections**

